


Camlock couplings with safety handles

According to EN 14420-7 for PN 10 to PN 16

System gaskets: CSM
Thread seals: PTFE

¹ Thread: G = EN ISO 228/BSP, R = ISO 7-1/BSPT
² Materials: SS = stainless steel

Technical specifications are subject to change without further notice.

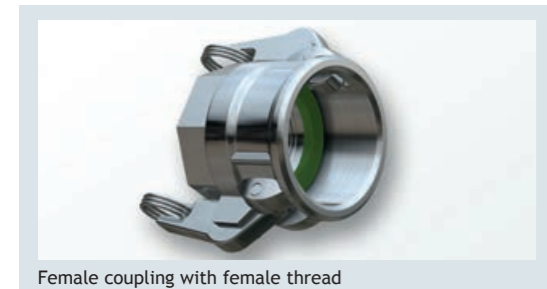

Female coupling with female thread



Female coupling with hose fitting



Cap



Female coupling with male thread



Female couplings with female thread and safety handles

Order no.	Size	Thread ¹	Working pressure bar	Material ²	Weight = kg
KKSD 34 SS	DN 20 - 3/4"	G 3/4	16	SS	0.380
KKSD 10 SS	DN 25 - 1"	G 1	16	SS	0.485
KKSD 32 SS	DN 32 - 1 1/4"	G 1 1/4	16	SS	0.730
KKSD 38 SS	DN 40 - 1 1/2"	G 1 1/2	16	SS	0.840
KKSD 20 SS	DN 50 - 2"	G 2	16	SS	0.915
KKSD 65 SS	DN 65 - 2 1/2"	G 2 1/2	16	SS	1.140
KKSD 30 SS	DN 80 - 3"	G 3	16	SS	1.635



Female couplings with hose fitting and safety handles

Order no.	Size	DN mm	Working pressure bar	Material ²	Weight = kg
KKSCS 34 SS	DN 20 - 3/4"	19	16	SS	0.380
KKSCS 10 SS	DN 25 - 1"	25	16	SS	0.505
KKSCS 32 SS	DN 32 - 1 1/4"	32	16	SS	0.750
KKSCS 38 SS	DN 40 - 1 1/2"	38	16	SS	0.780
KKSCS 20 SS	DN 50 - 2"	50	16	SS	0.880
KKSCS 65 SS	DN 65 - 2 1/2"	63	16	SS	1.165
KKSCS 30 SS	DN 80 - 3"	75	16	SS	1.655



Female couplings with male thread and safety handles

Order no.	Size	Thread ¹ in inch	Working pressure bar	Material ²	Weight = kg
KKSB 12 SS	DN 13 - 1/2"	R 1/2	16	SS	0.300
KKSB 34 SS	DN 20 - 3/4"	R 3/4	16	SS	0.375
KKSB 10 SS	DN 25 - 1"	R 1	16	SS	0.485
KKSB 32 SS	DN 32 - 1 1/4"	R 1 1/4	16	SS	0.730
KKSB 38 SS	DN 40 - 1 1/2"	R 1 1/2	16	SS	0.840
KKSB 20 SS	DN 50 - 2"	R 2	16	SS	0.915
KKSB 65 SS	DN 65 - 2 1/2"	R 2 1/2	16	SS	1.140
KKSB 30 SS	DN 80 - 3"	R 3	16	SS	1.635
KKSB 40 SS	DN 100 - 4"	R 4	10	SS	2.600



Caps with safety handles

Order no.	Size	Working pressure bar	Material ²	Weight = kg
KKSDC 34 SS	DN 20 - 3/4"	16	SS	0.360
KKSDC 10 SS	DN 25 - 1"	16	SS	0.455
KKSDC 32 SS	DN 32 - 1 1/4"	16	SS	0.695
KKSDC 38 SS	DN 40 - 1 1/2"	16	SS	0.720
KKSDC 20 SS	DN 50 - 2"	16	SS	0.775
KKSDC 65 SS	DN 65 - 2 1/2"	16	SS	0.965
KKSDC 30 SS	DN 80 - 3"	16	SS	1.370
KKSDC 40 SS	DN 100 - 4"	10	SS	2.170