



Hose couplings with aseptic clamping connections according to DIN 32676

Order no.	DN <sup>1</sup>	Head size in mm	Material <sup>3</sup>
TCS13	13 x 5	34.0	SS
TCS19	19 x 6	34.0	SS
TCS25	25 x 6	50.5	SS
TCS32	32 x 6	50.5	SS
TCS38	38 x 6.5	50.5	SS
TCS50	50 x 8	64.0	SS
TCS65	65 x 8	91.0	SS
TCS75	75 x 8	106.0	SS
TCS100	100 x 8	119.0	SS




Hose couplings with aseptic flange connection according to DIN 11864-2 Form A

Order no.	DN <sup>1</sup>	Flange size in mm	Material <sup>3</sup>
ASFB15A	13 x 5	59.0	SS
ASFB20A	19 x 6	64.0	SS
ASFB25A	25 x 6	70.0	SS
ASFB32A	32 x 6	76.0	SS
ASFB38A	38 x 6.5	82.0	SS
ASFB50A	50 x 8	94.0	SS
ASFB65A	65 x 8	113.0	SS
ASFB75A	75 x 8	133.0	SS
ASFB100A	100 x 8	159.0	SS




Hose coupling with aseptic flange according to DIN 11864-2 form A

Order no.	DN <sup>1</sup>	Flange size in mm	Material <sup>3</sup>
ASFN15A	13 x 5	59.0	SS
ASFN20A	19 x 6	64.0	SS
ASFN25A	25 x 6	70.0	SS
ASFN32A	32 x 6	76.0	SS
ASFN38A	38 x 6.5	82.0	SS
ASFN50A	50 x 8	94.0	SS
ASFN65A	65 x 8	113.0	SS
ASFN75A	75 x 8	133.0	SS
ASFN100A	100 x 8	159.0	SS



Hose couplings with aseptic screwed pipe connection with swivel nut

Order no.	DN <sup>1</sup>	Thread <sup>2</sup>	Material <sup>3</sup>
ASM15A	13 x 5	Rd. 34 x 1/8"	SS
ASM20A	19 x 6	Rd. 44 x 1/6"	SS
ASM25A	25 x 6	Rd. 52 x 1/6"	SS
ASM32A	32 x 6	Rd. 58 x 1/6"	SS
ASM38A	38 x 6.5	Rd. 65 x 1/6"	SS
ASM50A	50 x 8	Rd. 78 x 1/6"	SS
ASM65A	65 x 8	Rd. 95 x 1/6"	SS
ASM75A	75 x 8	Rd. 110 x 1/4"	SS
ASM100A	100 x 8	Rd. 130 x 1/4"	SS



Hose couplings with aseptic screwed pipe connection with male thread


Order no.	DN <sup>1</sup>	Thread <sup>2</sup>	Material <sup>3</sup>
ASV15A	13 x 5	Rd. 34 x 1/8"	SS
ASV20A	19 x 6	Rd. 44 x 1/6"	SS
ASV25A	25 x 6	Rd. 52 x 1/6"	SS
ASV32A	32 x 6	Rd. 58 x 1/6"	SS
ASV38A	38 x 6.5	Rd. 65 x 1/6"	SS
ASV50A	50 x 8	Rd. 78 x 1/6"	SS
ASV65A	65 x 8	Rd. 95 x 1/6"	SS
ASV75A	75 x 8	Rd. 110 x 1/4"	SS
ASV100A	100 x 8	Rd. 130 x 1/4"	SS



Hose coupling with aseptic clamping connection



Hose coupling with aseptic flange connection

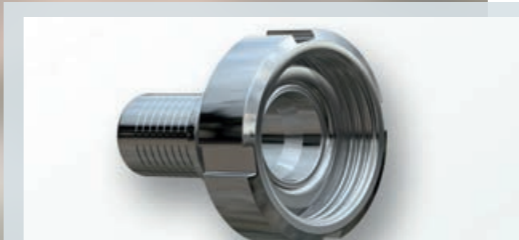

Hose coupling, aseptic screwed pipe connection, swivel nut

# Aseptic fittings for foodstuff, chemical and pharmaceutical industry

Suitable for 16 bar working pressure (PN 16)

Hose coupling with aseptic screwed pipe connection according to DIN 11865-1 Form A with male thread and swivel nut

Hose coupling with aseptic flanges according to DIN 11864-2 form A.

Hose coupling with aseptic clamping connections according to DIN 32676

<sup>1</sup> DN: inner diameter of hose x wall thickness in mm

<sup>2</sup> Thread: Rd. = round thread according to DIN 405


<sup>3</sup> Material: SS = stainless steel

Other materials on request

Technical specifications are subject to change without further notice.



Hose coupling with aseptic groove-faced flange

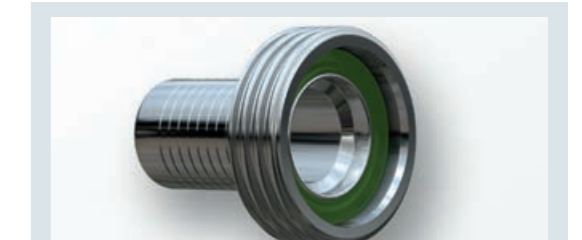

Hose coupling, aseptic screwed pipe connection, male thr.